


Lint Trap for stacked dryer

Model SLT

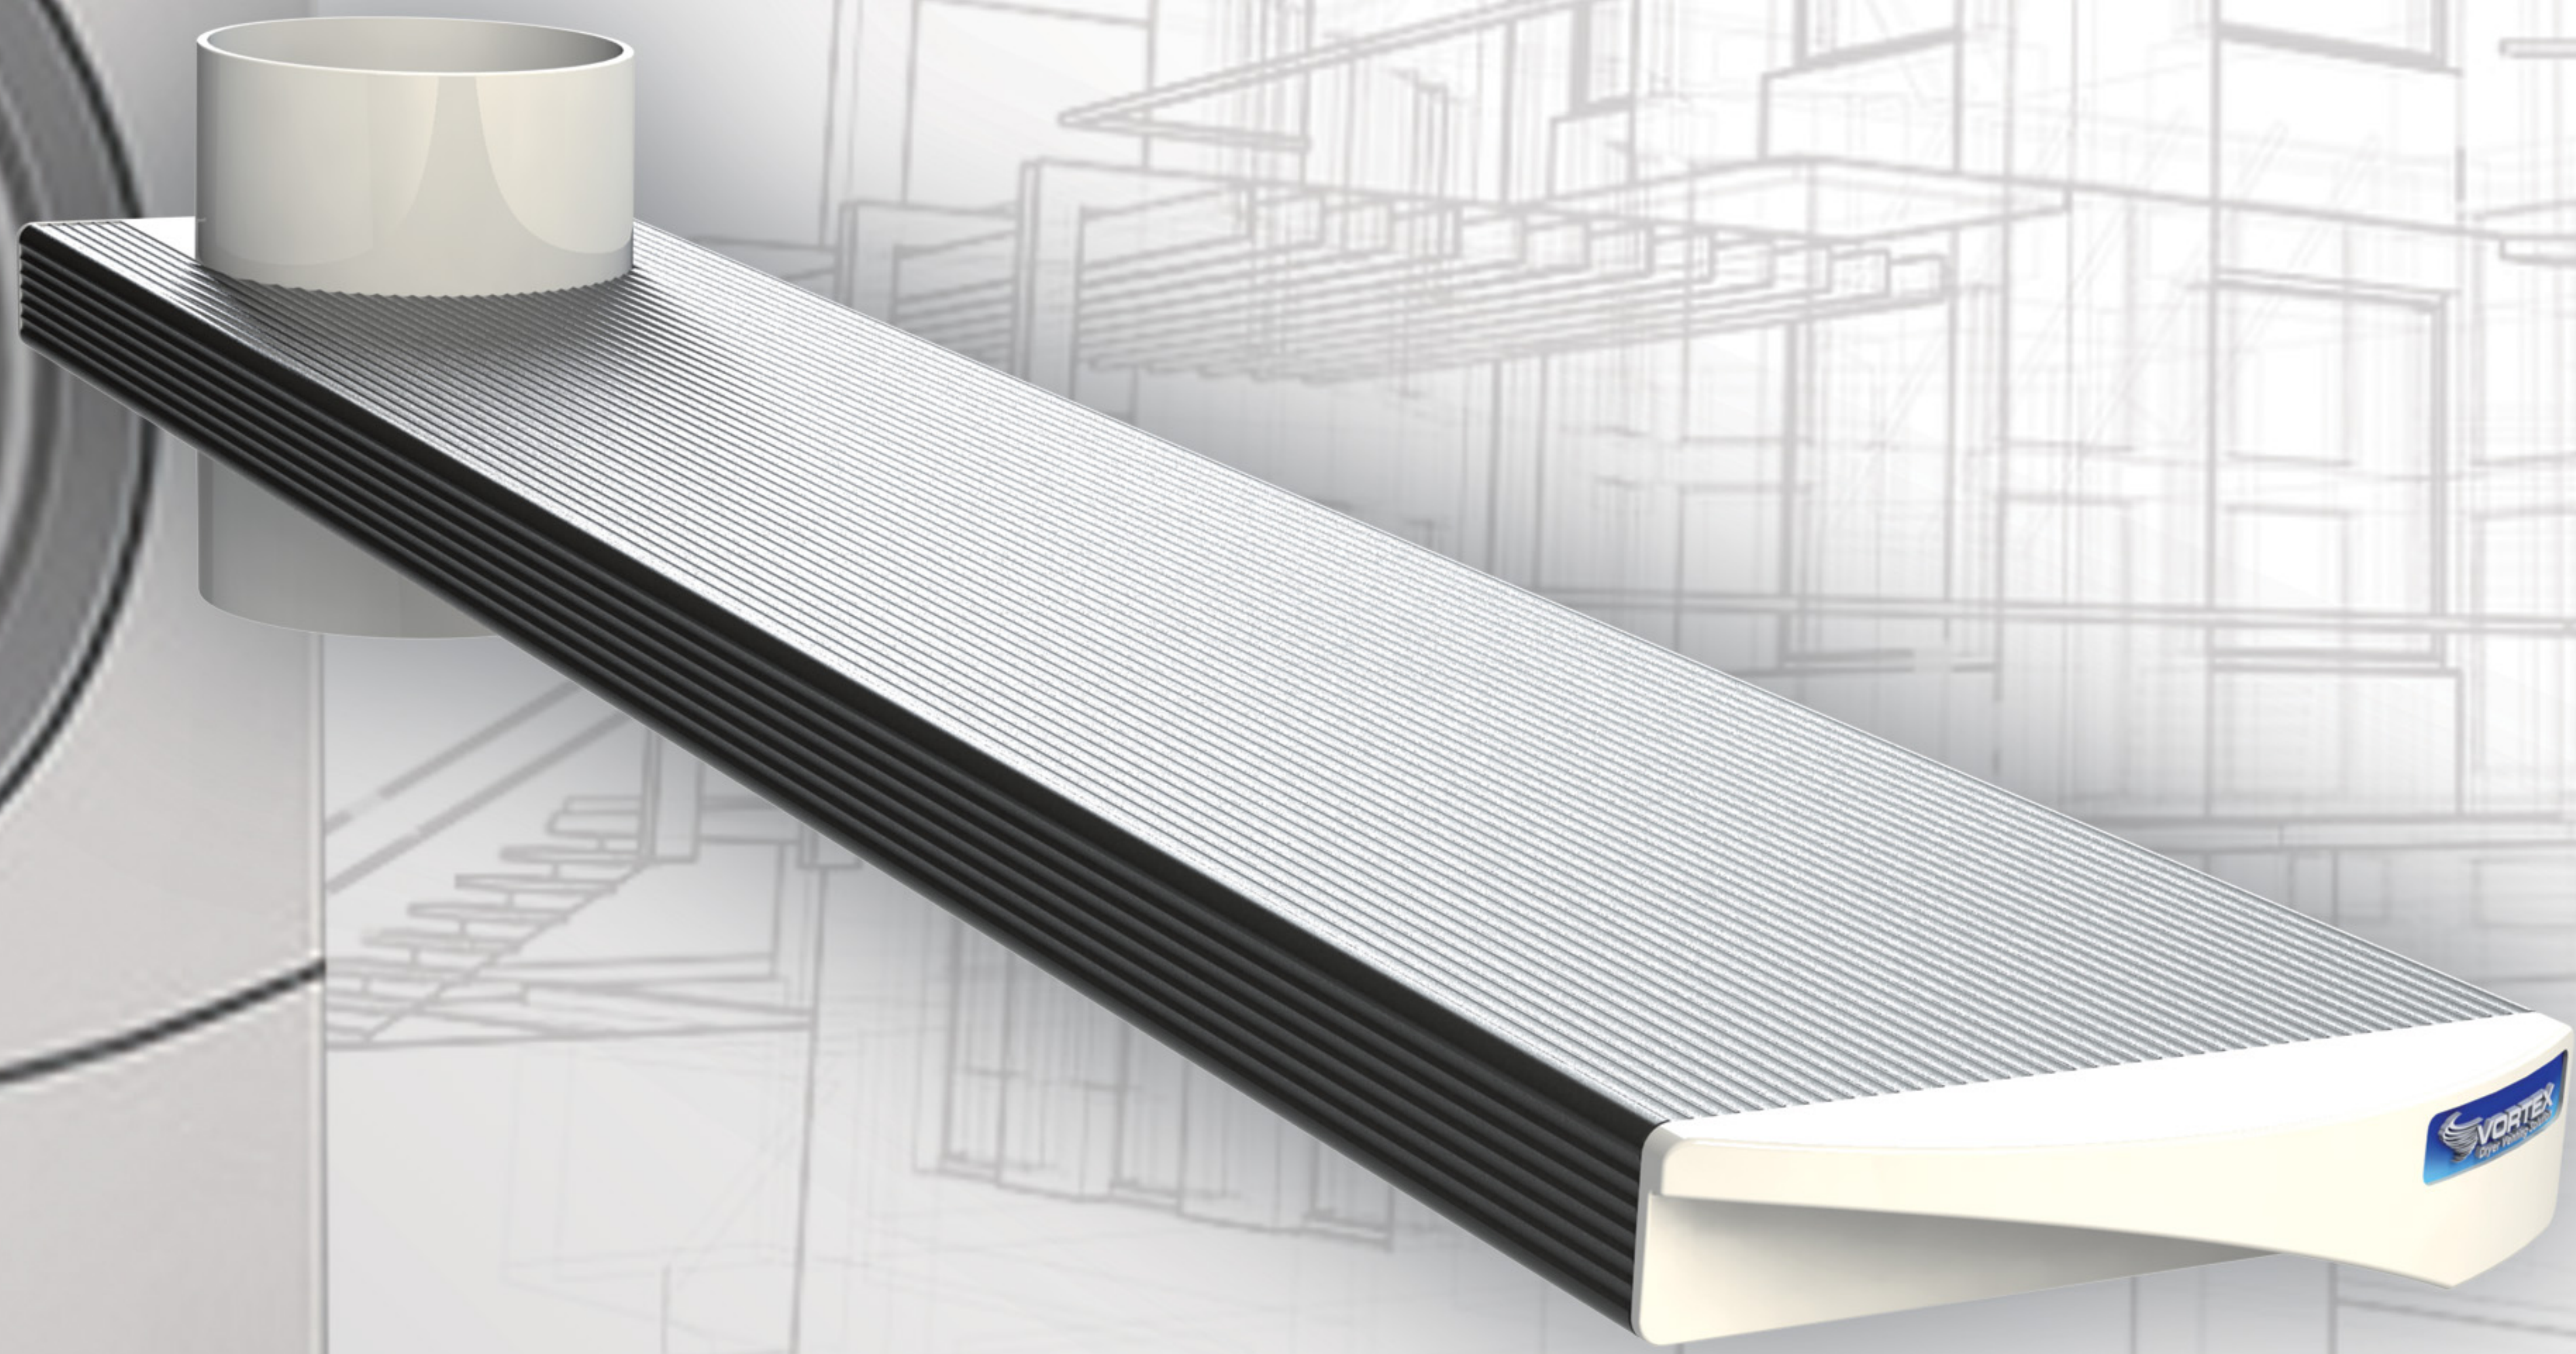

FEATURES:


- *Simple and quick installation*
- *41 sq. inch filtering area
increases dryer efficiency*
- *Washable nylon filter screen*
- *4" duct adapter*
- *Aluminum extrusion body*
- *Aluminum slider*
- *Easy to clean*




WWW.ATMOSPHERE.COM

2480 boul. des Entreprises Terrebonne, QC, Canada J6X 4J8

Tel.: 450 477-1100 Fax: 514 313-5700 Toll Free: 1 800 489-1301 Email: info@atmosphere.com

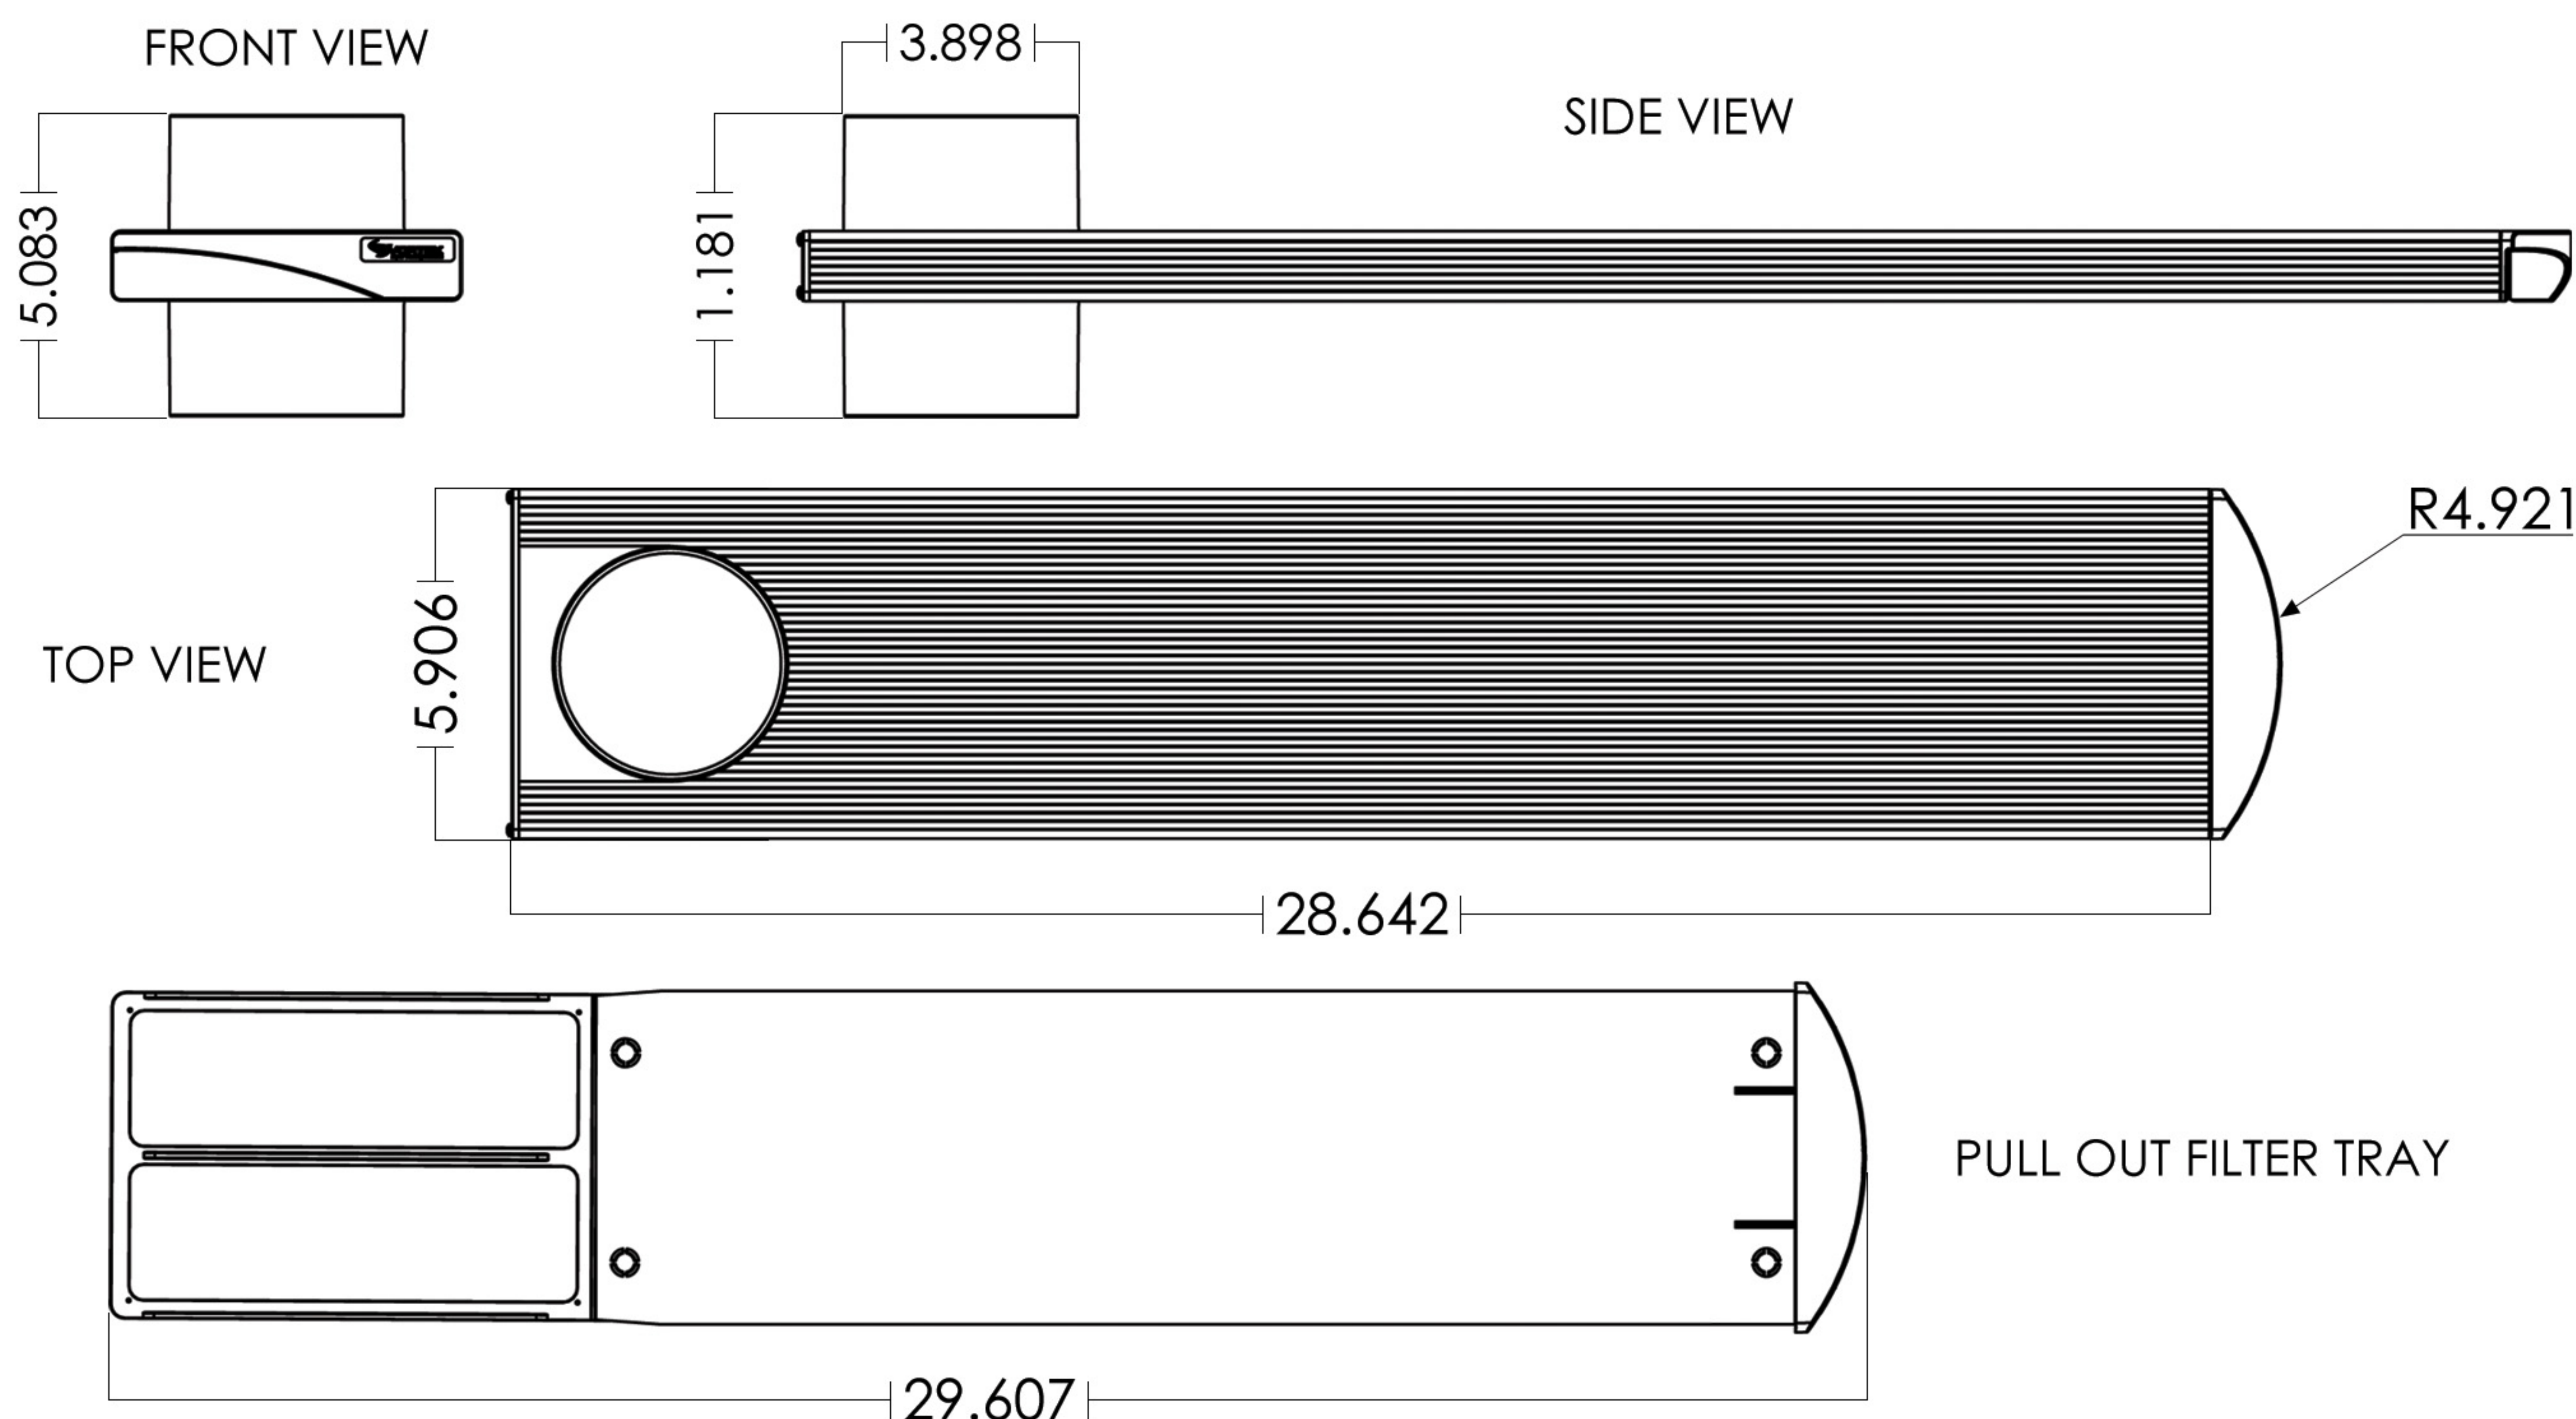

INSTALLATION INSTRUCTIONS

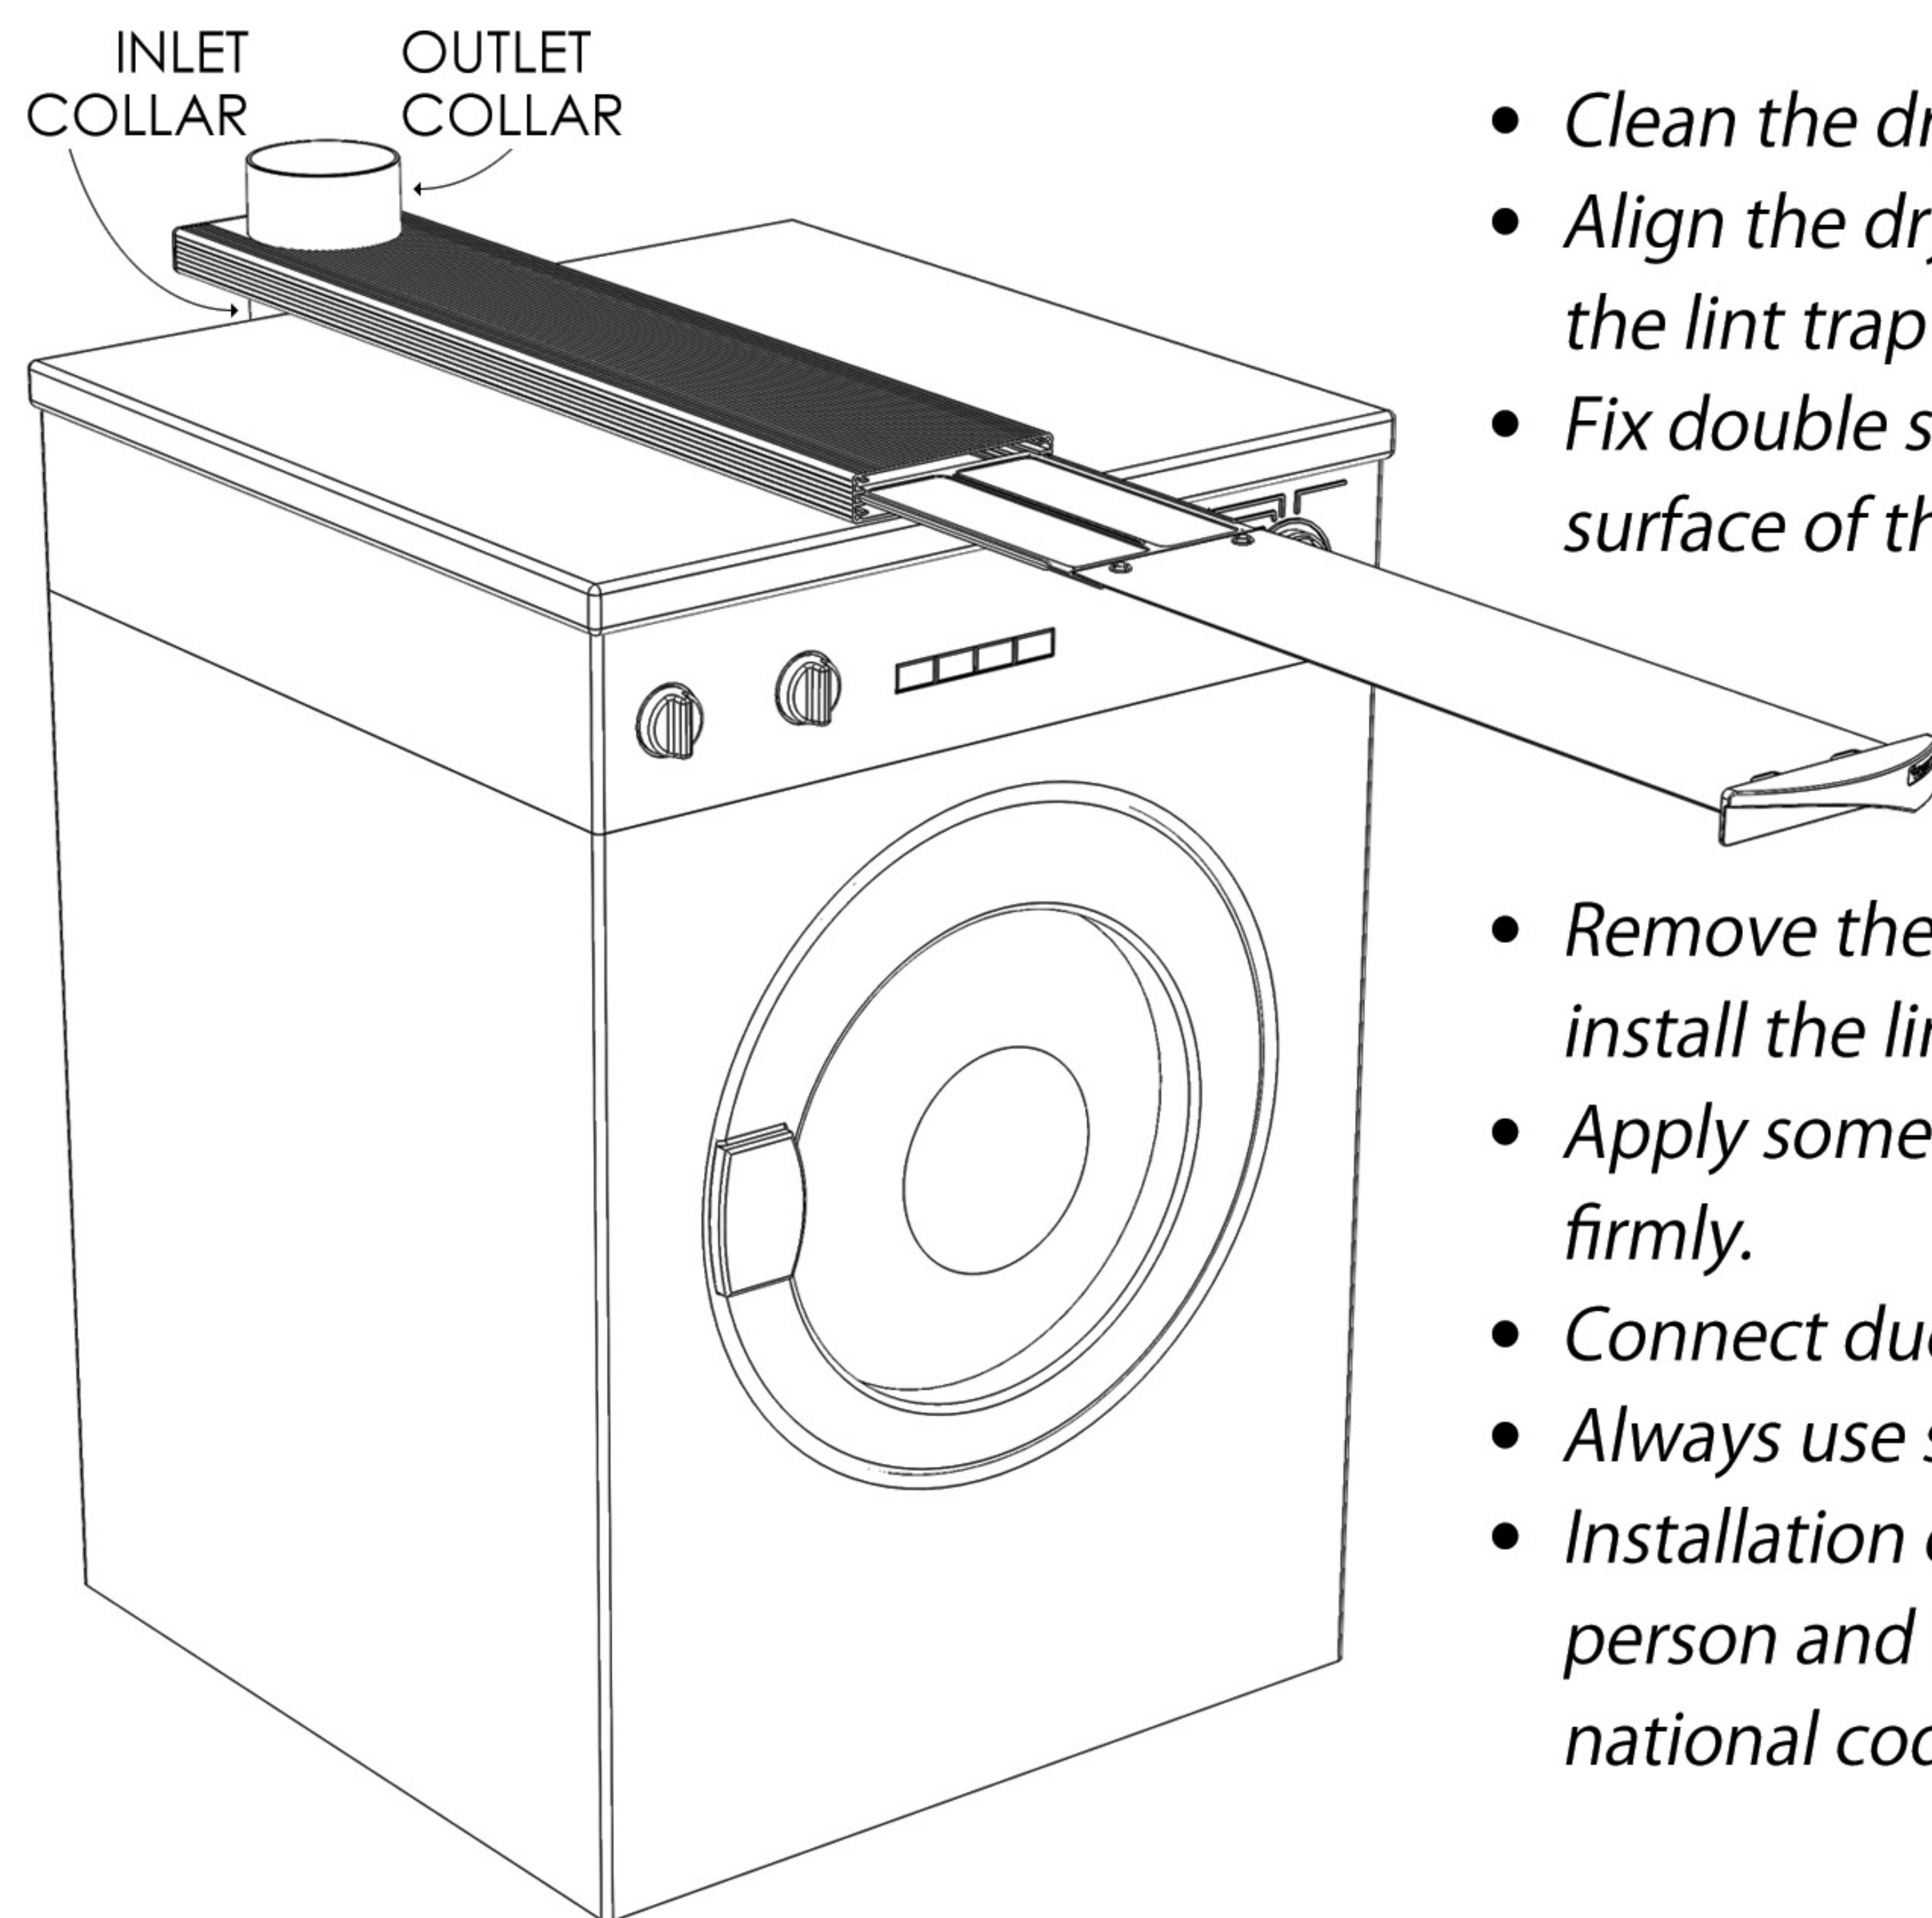

- Clean the dryer top surface properly before installation.
- Align the dryer exhaust with the lint trap collar and mark the lint trap position on the top of the dryer.
- Fix double sided foam tape (not supplied) on the bottom surface of the lint trap.
- Remove the remaining side of the foam tape strips and install the lint trap on the dryer top surface as marked.
- Apply some force downwards on the lint trap to hold it firmly.
- Connect duct to inlet and outlet collar.
- Always use solid metal pipe.
- Installation of the lint trap must be done by a qualified person and be in accordance with all municipal and national codes and standards.

IMPORTANT: CLEAN LINT TRAP BEFORE EVERY DRYER CYCLE