

Submittal Sheet

VMF Series

Inline Centrifugal Fans

Standard Features

- Brackets included for wall or ceiling mount
- Can be mounted in any position
- Suitable for airstream temperatures up to 140°F (60°C)
- 1 year limited manufacturers warranty
- Mixflow impeller
- Quiet operation
- 4" to 8" duct diameters
- From 157 to 617 CFM
- Speed controllable easing air flow adjustment
- Prewired with 120V power cord
- ETL Listed


VMF Series View & Sizes

All dimensions in inches

FAN MODEL	Weight (lbs.)**	A*	B	C	D	E	F	G
VMF400	00	3.875	11.625	5	8	3.25	7.875	3.75
VMF600		5.875	11.5	5	9.125	3.25	9	3.75
VMF800		7.875	12	6.5	9.75	3.25	9.625	4.75

** Mounting Bracket included

* Represents Duct Dimensions

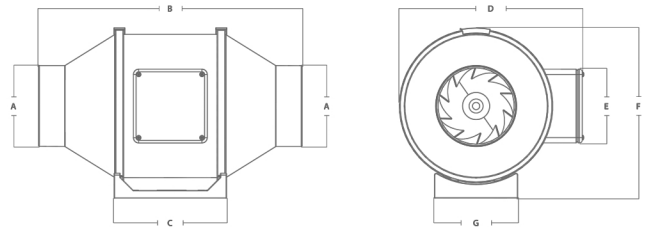

VMF Series Performance Data

ALL VMF PRODUCTS INCORPORATE MOTORS SUITABLE FOR 120 Volts AC 60Hz ELECTRICAL SUPPLY ONLY

FAN MODEL	Duct Dia.	RPM	Volts	Rated Watts	Max Amps	Static Pressure in Inches W.G.							Max Ps		
						0"	.125"	.25"	.375"	.5"	.75"	1"		1.25"	1.5"
VMF400	4"	2400	120	60	0.85	157	128	105	81	60	22	---	---	---	0.84"
VMF600	6"	2400	120	70	0.58	329	301	273	250	227	156	---	---	---	1.1"
VMF800	8"	2450	120	190	1.59	617	538	490	418	335	198	100	---	---	1.44"

Performances are based on installation type D - Ducted inlet, Ducted outlet. Speed (RPM) shown is nominal. Performance is based on actual speed of test.

VMF Fan Specifications

Fan Tag	Fan Model	Qty	CFM	SP	Accessories	Remarks

Project _____ Submitted _____
 Customer _____ Approved _____
 Location _____



CONFORMS TO UL 507
 CERTIFIED TO CSA C22.2 no.113

WWW.ATMOSPHERE.COM
 info@atmosphere.com



CANADA 2480 Boul. des Entreprises Terrebonne, Quebec J6X 4J8
 T: 450.477.1100 F: 514.313.5700 TF: 1.800.489.1301